


MOTORIZED DIGITAL ROCKWELL/SUPERFICIAL ROCKWELL HARDNESS TESTERS

POPULAR
MODEL

INSPECTION
CERTIFICATE

FORCE LOADING BY ELECTRIC
MOTOR (WITHOUT WEIGHTS)


TOUCH
SCREEN

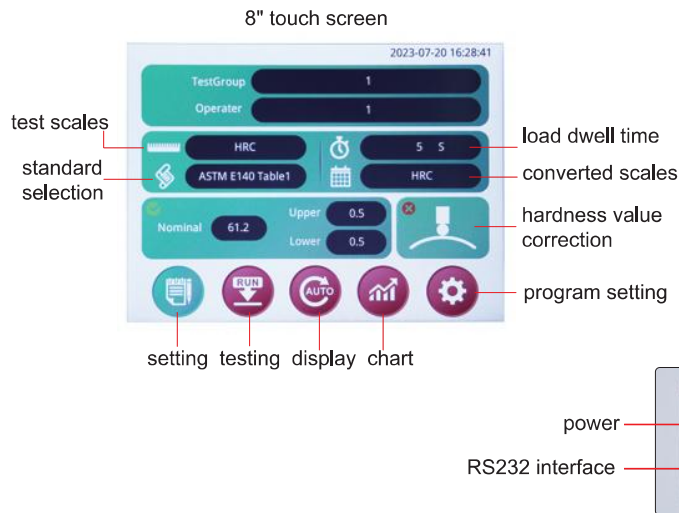


HDT-RT151

- Comply with test standards ISO 6508, ASTM E18, JIS Z 2245
- Implement ISO, ASTM scale conversion standards
- Electronic loading test force, with high accuracy and stable measurement values
- 8-inch touch screen for operation and display
- Capable of testing 15 Rockwell hardness scales and optional Superficial Rockwell scales
- Main unit stores 500 data groups independently; data retained after power failure
- Hardness correction function available based on cylinder size
- Wireless data transmission system is optional

computer software (included)

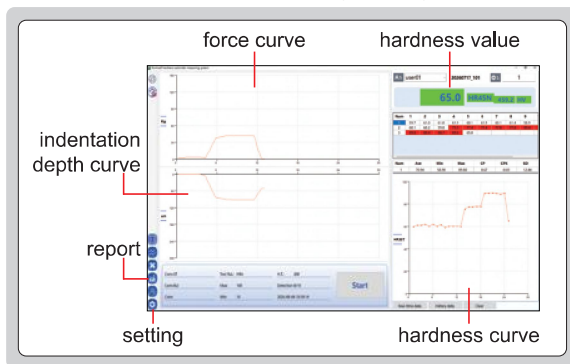

test interface

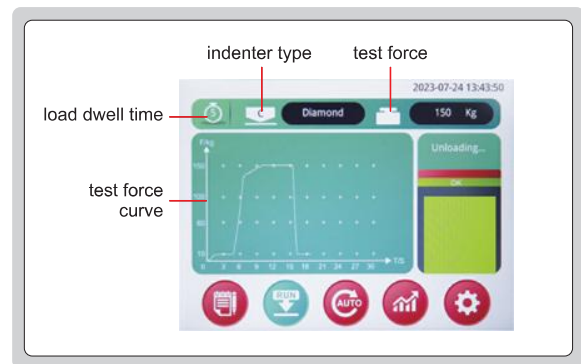

test result display interface


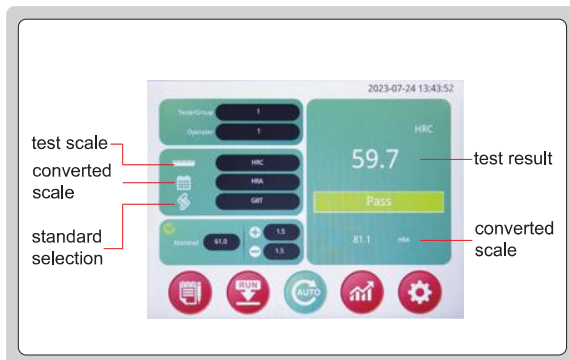


chart interface

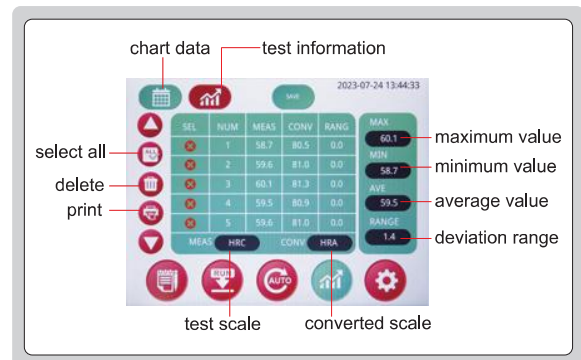

SPECIFICATION

Code		HDT-RT151	HDT-RT152	HDT-RT153
Type		Rockwell	Superficial Rockwell	Rockwell and Superficial Rockwell
Measurement range		20~95HRA, 10~100HRB, 10~70HRC, 40~77HRD, 60~100HRF, 30~94HRG	70~94HR15N, 42~86HR30N, 20~77HR45N, 67~93HR15T, 29~82HR30T, 10~72HR45T	20~95HRA, 10~100HRB, 10~70HRC, 40~77HRD, 60~100HRF, 30~94HRG, 70~94HR15N, 42~86HR30N, 20~77HR45N, 67~93HR15T, 29~82HR30T, 10~72HR45T
Hardness scale	with indenter included	HRA, HRB, HRC, HRD, HRF, HRG	HR15N, HR30N, HR45N, HR15T, HR30T, HR45T	HRA, HRB, HRC, HRD, HRF, HRG, HR15N, HR30N, HR45N, HR15T, HR30T, HR45T
	with optional indenter	HRE, HRH, HRK, HRL, HRM, HRP, HRR, HRS, HRV	HR15W, HR30W, HR45W, HR15X, HR30X, HR45X, HR15Y, HR30Y, HR45Y	HRE, HRH, HRK, HRL, HRM, HRP, HRR, HRS, HRV, HR15W, HR30W, HR45W, HR15X, HR30X, HR45X, HR15Y, HR30Y, HR45Y
Converted scales		HV, HK, HBW, HBS, HRA, HRB, HRC, HRD, HRE, HRF, HRG, HR15N, HR30N, HR45N, HR15T, HR30T, HR45T		
Preliminary test force		98N (10kgf)	29.4N (3kgf)	Rockwell: 98N (10kgf); Superficial Rockwell: 29.4N (3kgf)
Test force		588N (60kgf), 980N (100kgf), 1471N (150kgf)	147N (15kgf), 294N (30kgf), 441N (45kgf)	Rockwell: 588N (60kgf), 980N (100kgf), 1471N (150kgf); Superficial Rockwell: 147N (15kgf), 294N (30kgf), 441N (45kgf)
Stage lifting		manual		
Load control		automatic (load/dwell/unload)		
Resolution		0.1 HR		
Load dwell time		2~60 seconds		
Max. workpiece height		230mm		
Max. testing width		170mm (indenter to frame distance)		
Power supply		100~240V, 50/60Hz		
Dimension (L×W×H)		475×200×700mm		
Net weight		70kg		

STANDARD DELIVERY

Code	HDT-RT151	HDT-RT152	HDT-RT153
Main unit	1 pc	1 pc	1 pc
Diamond indenter	1 pc	1 pc	1 pc
Ø1.5875mm carbide ball indenter	1 pc	1 pc	1 pc
Ø150mm flat anvil	1 pc	1 pc	1 pc
Ø58mm flat anvil	1 pc	1 pc	1 pc
V-type anvil	1 pc	1 pc	1 pc
Hardness test block HRC20~30	1 pc	—	1 pc
Hardness test block HRC40~50	1 pc	—	—
Hardness test block HRC60~70	1 pc	—	1 pc
Hardness test block HRBW80~100	1 pc	—	1 pc
Hardness test block HRA80~90	1 pc	—	—
Hardness test block HR15N80~90	—	1 pc	—
Hardness test block HR30N65~80	—	1 pc	1 pc
Hardness test block HR30TW70~85	—	1 pc	1 pc
Software	1 pc	1 pc	1 pc
Printer	1 pc	1 pc	1 pc
Anti-dust cover	1 pc	1 pc	1 pc



Ø150mm flat anvil
(included)



Ø58mm flat anvil
(included)



V-type anvil
(included)



printer
(included)



wireless data transmitter
(optional)

OPTIONAL ACCESSORY

Hardness test block	
Ø12.7mm carbide ball indenter	HDT-RT15-INDENTER1
Ø6.35mm carbide ball indenter	HDT-RT15-INDENTER2
Ø3.175mm carbide ball indenter	HDT-RT15-INDENTER3
Ø1.5875mm carbide ball indenter	SPI-HDT-RW160-HRB-INDENTER
Diamond indenter	SPI-HDT-RW160-HRC-INDENTER
Wireless data transmission transmitter*	7315-HDT-M
Wireless data transmission receiver*	7315-2/3/6/7/8/9

*The wireless data transmission transmitter and receiver must be purchased together